

## YOUR SB 1200: CONFIGURED TO YOUR PREFERENCES

### 1 SB 1200 BASIC (BLACK)

- 12.1" touch screen
- 2 grinders, 1.2kg/1.2kg
- iQFlow™
- Single spout dispenser system (automatic height adjustment 80-180 mm)
- Hot water spout positioned centrally within single spout
- Cup detection
- First Shot

### SB 1200 OPTIONS:

- IndividualMilk Technology\*
- Iced Coffee Module (IC) (right side)
- Powder dosing units (right side not possible with IC option)
- Coffee grounds ejection
- Lockable hopper(s)

### 2 ACCOUNTING SYSTEM

- Two sizes, standard or compact
- Accounting System can be used for various payment methods, e.g. coins, cards.
- Ideally suited to public/private vending applications

### 3 CUP WARMER

- With four heatable trays

### 4 FLAVOR STATION UT (FSU60)

- Automatic dosing station for up to six flavors
- Message appears when refilling is needed
- Plug-in connectors (CMB)
- Flavor Station CleanMaster

### 5 FLAVOR STATION (FS6 FOR SB 1200 COMPACT FOOTPRINT)

- Automatic dosing station for up to six flavors
- Message appears when refilling is needed
- Flavor Station EasyClean

### 6 COOLING UNIT SU 12 (SB 1200 COMPACT FOOTPRINT)

- FoamMaster™ (FM): hot/cold milk and milk foam, individually adjustable consistency, integrated cleaning system.
- CleanMaster (CM): fully automatic cleaning system with integrated cleaning cartridge. For outstanding hygiene and unbeatable simplicity, efficiency, and convenience.

### 7 COOLING UNIT UT40 (SB 1200 STANDARD FOOTPRINT)

- Increased capacity, up to 40 liters
- 1-4 Media Pump Modules for milk, cold brew or other requested media
- Message appears when refilling is needed
- Plug-in connectors (CMB)

### 8 CLEANMASTER

- Fully automatic cleaning process meeting highest hygiene standards
- CleanMaster module for Media Pump Modules and Flavor Station



**FRANKE**

MAKE IT WONDERFUL

Franke Kaffeemaschinen AG  
cs-info.ch@franke.com

Franke Coffee Systems GmbH  
cs-info.de@franke.com

Franke Coffee Systems Americas  
cs-coffeesales.us@franke.com

Franke Coffee Systems UK  
sales@Frankecoffeesystems.co.uk



coffee.franke.com

# SB 1200 SPECIALTY BEVERAGE STATION WITH INDIVIDUALMILK TECHNOLOGY\* (IMT)

Give your customers true choice with our unique and versatile Specialty Beverage Station SB 1200 featuring our game-changing IndividualMilk Technology\*. Maximum enjoyment is ensured when you increase beverage choices to include the pure milk varieties today's mindful consumers are demanding.

Pure milk choices – it's your promise to your customers. Together with our SB 1200 and IndividualMilk Technology\* you can offer purely vegan and purely dairy drinks. Ensure reliable enjoyment all from the same exact, fully automatic coffee machine footprint and all prepared and dispensed absolutely free of cross-contamination and residues.

Capture your share of this growing market demand, expand your customer base, and increase foot traffic when you double the number of milk-style beverage choices in your customized menu.

IndividualMilk Technology\* is the latest addition to the full range of Franke Coffee Technologies available on the Specialty Beverage Station. It relies on our FoamMaster™ technology, for hot/cold milk and milk foam, to guarantee two milk varieties remain pure from storage through to in-cup dispensing. Give your customers access to the pure choices they truly want, from espresso-based beverages, to iced coffee, cold brew, or flavored drinks.



#### INDIVIDUALMILK TECHNOLOGY\*

Two, fully separate FoamMaster™ systems in one machine customizes menus with purely vegan and purely dairy options.



#### iQFlow™

Our patented, groundbreaking technology that extracts more flavor for unrivaled, consistent in-cup quality



#### FOAMMASTER™

Integrated as a standard, for perfect foam, every time – now featuring IndividualMilk Technology\*

**FRANKE**


MAKE IT WONDERFUL

# FRANKE INDIVIDUALMILK TECHNOLOGY\* (IMT)

**UNIQUE COFFEE EXPERIENCES WITH ANY VARIETY OF MILK – ALL KEPT ABSOLUTELY SEPARATE, RIGHT INTO EACH CUP**

With this Franke Coffee Technologies, you're offering your customers more than just their choice of milk. You're giving them a guarantee. Because whichever milk they choose, it is prepared completely separately from other milk in the same machine – purely, from storage through to cup.

- ◆ IndividualMilk Technology\* is only available on new Franke Specialty Beverage Station SB1200 standard or compact footprint configurations.
- ◆ 100% free of cross-contamination
- ◆ Expanded range of beverages – any choice of milk for every kind of coffee beverage.
- ◆ Tailored milk foam texture and consistency profiles – true, high-quality foam for every beverage with every milk, with FoamMaster™ Technology.

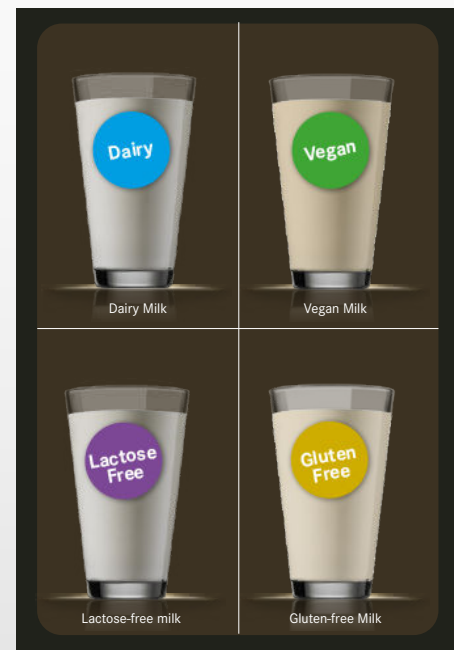


Clear and simple: A single tap on the intuitive and user-friendly touch screen makes milk choice easy, just like choosing a hot or cold coffee beverage.



# YOUR SB1200 (IMT): FLEXIBILITY


## OPTIONS MEDIA PUMP MODULES

**2 x One Media (OM) Pump Modules**  
Standard Version UT40




Two completely separate milk types  
10 liters each

**3 x One Media (OM) Pump Modules**  
Option Cold Brew UT40



Two completely separate milk types  
10 liters each  
One cold brew  
10 liters

**2 Pump Modules**  
Option Double Media (DM) Pump Module



Two completely separate milk types  
20 liters per media type  
(e.g., Dairy: 10l whole and 10l skim, Vegan: 10l almond and 10l oat)




## CLEANMASTER

CleanMaster makes daily operations easier. All components and modules are cleaned in an automatic process. This includes the centrally placed single spout which is cleaned in place, without the need for removal/disassembly. In addition, the optional Flavor Station unit (FSU6) is equipped with the Flavor Station CleanMaster, an exclusive feature that is unique to this product segment.



**4 x One Media (OM) Pump Modules**  
SB1200 TWIN UT40



Two completely separate milk types per TWIN coffee machine  
10 liters each



For even greater flexibility, also available as a Twin solution

SB1200 Coffee Machine

Iced Coffee Module

Single dispensing spout – separate outlets, no cross-contamination

CleanMaster for Flavor Station

CleanMaster for Media Pump Modules

Cooling Unit UT40 CM with Media Pump Modules

Flavor Station for up to 6 flavors

Cold brew

Dairy milk

Vegan milk

Franke Specialty Beverage Station is delivered independently of cabinetry. Furniture must be sourced separately.

# SB 1200 SPECIALTY BEVERAGE STATION COMPACT FOOTPRINT

Maximum choice, maximum flexibility, minimum effort: anywhere you need it. Now, our unique, versatile Specialty Beverage Station SB1200 is available in a more compact footprint to fit the space you already have. The freedom to optimize your self-serve or served coffee business has never been easier with this fully automatic coffee machine solution.

In its new, compact format, Franke's SB1200 takes its one-of-a-kind to-go coffee experience to any customer environment. Just like the original, this smaller footprint SB 1200 features a vast variety of beverages – from espresso-based and milk/foam beverages to iced coffee, cold brew, and flavored drinks.

Making it easier for you to take customer satisfaction to a whole new level, this streamlined version of the SB1200 is still packed with all the Franke Coffee Technologies.

The compact SB1200 solution remains state-of-the-art with iQFlow™ technology for extracting the most flavor from every bean, FoamMaster™ for the perfect, silky texture of hot/cold milk and milk foam. With the CleanMaster for optimal, easy, and reliable hygiene, Flavor Station for unlimited coffee creations, and the outstanding user experience enabled by the 12.1" touch screen.



#### INDIVIDUALMILK TECHNOLOGY\*

Two, fully separate FoamMaster™ milk systems in one machine customizes menus with purely vegan and purely dairy options.



#### iQFlow™

Our patented, groundbreaking technology that extracts more flavor for unrivaled, consistent in-cup quality



#### FOAMMASTER™

Integrated as a standard, for perfect foam, every time – now featuring IndividualMilk Technology\*

## YOUR SB 1200 COMPACT FOOTPRINT: CONFIGURED TO YOUR PREFERENCES

### FLEXIBILITY

#### Basic configuration:

- 2 x One Media (OM) Pump Module, 4,5 liters each
- Message appears when refilling is needed
- CleanMaster

#### Main features:

- 2 completely separate Media Pump Modules for 2 milks, or one milk and one cold brew, or other requested media
- Media supply with Franke 4,5 liter containers

### COMPACT SB 1200 SOLUTION

This SB1200 features all the Franke Coffee Technologies you need to satisfy customers and strengthen your coffee business.



### COMPACT VERSATILITY

Suited to any POS and customer environment and can be configured to include Flavor Station (FS6) and Accounting System units.



# SB1200 SPECIALTY BEVERAGE STATION

Maximum choice, maximum flexibility, minimum effort: Introducing the breakthrough innovation that increases beverage choices. With our unique and versatile SB1200, it's all about the moment when leading technology helps you take customer satisfaction to a whole new level. Capturing your share of the specialty coffee segment is easy with this professional, fully automatic coffee machine solution. Fitting into any customer environment, the SB1200 offers maximum beverage choice and boost your self-serve and served coffee business. Customize your beverage menus to include a vast variety of beverages – from espresso-based and milk-style beverages to iced coffee, cold brew

and flavored drinks. The SB1200 is packed with our state-of-the-art Franke Coffee Technologies: iQFlow™ technology is integrated as a standard feature to ensure your customers enjoy consistent high in-cup quality, all day, every day; the SB1200's intuitive 12.1" touch screen enables your customers to quickly and easily serve themselves; FoamMaster™ technology serves hot/cold milk and milk foam just like a barista would make it; and the fully automatic CleanMaster cleaning system delivers optimal hygiene with minimum effort.



**CLEANMASTER**  
Cleaning in place for all resources and without disassembly



**iQFlow™**  
Our patented, groundbreaking technology that extracts more flavor for unrivaled, consistent in-cup quality



**FOAMMASTER™**  
Integrated as a standard, for perfect foam, every time – now featuring IndividualMilk Technology\*

## YOUR SB1200: CONFIGURED TO YOUR PREFERENCES

### FLEXIBILITY


#### Basic configuration:

- 1 x One Media (OM) Pump Module, 10 liters
- Message appears when refilling is needed
- 1 x 10 liter container
- Plug-in connectors (CMB)
- CleanMaster pump module

#### Main features:

- Increased capacity, up to 40 liters
- 1-4 Media Pump Modules for milk, cold brew or other requested media
- Media supply with Franke 10 liter containers or Bag-in-Box with CMB plugin connectors

### COOLING UNIT UT40 CM WITH MEDIA PUMP MODULES

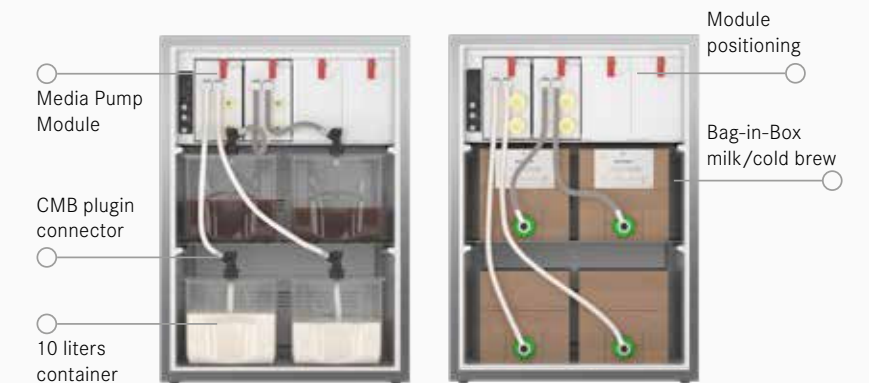

### OPTIONS MEDIA PUMP MODULES 2 PUMP MODULES

#### 2 x One Media (OM) Pump Module



One milk supply module  
10 liters

One cold brew module  
10 liters

#### 1 x One Media (OM) Pump Module 1 x Double Media (DM) Pump Module



One milk module  
10 liters

One cold brew module  
10 liters each, or 20 liters

#### 1 x Double Media (DM) Pump Module 1 x One Media (OM) Pump Module



One milk supply module  
10 liters each, or 20 liters

One cold brew module  
10 liters

#### 2 x Double Media (DM) Pump Module



One milk module  
10 liters each, or 20 liters


One cold brew module  
10 liters each, or 20 liters



Franke Specialty Beverage Station is delivered independently of cabinetry. Furniture must be sourced separately.

# SB 1200: UNMATCHED BEVERAGE VARIETY IN EVERY CONFIGURATION

## COLD BREW

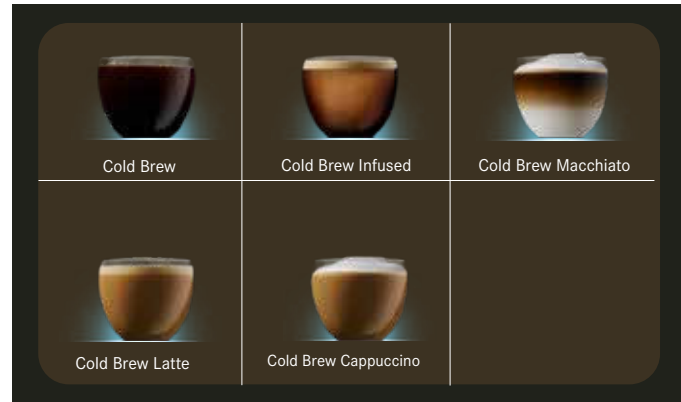


The SB1200 features the full range of cold brew beverages. Franke's cold brew module prepares a variety of cold brew beverages, such as "cream on top" or cascade effect without the additional use of nitrogen. Cold brew coffee can be served pure or mixed and served with milk, milk foam and/or syrup. Expand your beverage varieties and offer your customers even more choices - now also including vegan choices.



Cold Brew Infused

## PURE MILK CHOICES WITH INDIVIDUALMILK TECHNOLOGY\*

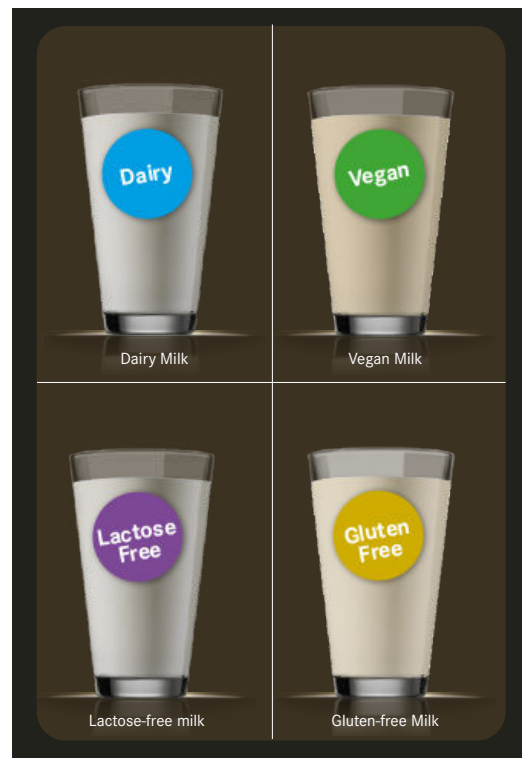

With the new IndividualMilk Technology\*, you're offering your customers more than just their choice of milk variety. You're giving them a guarantee. Because whichever milk varieties they choose, it is prepared completely separately from other milk in the same machine - purely, from storage through to cup.



Iced Soy Latte

## ICED COFFEE



Go beyond traditional drinks and enhance your coffee program with Franke's Iced Coffee Module. You can even develop a seasonal offering of deliciously refreshing cold espresso-based beverages. The coffee is freshly ground, brewed and then cooled. It can be combined with cold milk, milk foam and syrups. Iced coffee at its best, now vegan too!



Iced Café Latte

## TRADITIONAL BEVERAGES



The SB1200 with the Iced Coffee Module still delivers the traditional range of high in-cup quality beverages, combined with warm and cold milk, milk foam and syrups.




Cappuccino, Espresso

# TECHNICAL DATA


## MACHINE MODEL

<b>Model</b>	<b>Power</b>
SB1200	380-415 V 3LNPE 50/60 Hz 6,7-7,9 kW (16 A) 220-240 V 1LNPE 50/60 Hz 2,4-2,9 kW (16 A) 200-220 V 2LNPE (30A) 200-240 V 3LNPE (30A) 220-240 V 1LNPE (30A)
<b>Dimensions</b>	340 mm / 750 mm / 600 mm (W/H/D)
<b>Weight (empty)</b>	approx. 58 kg
<b>Color</b>	Black



## WATER CONNECTION

<b>Fixed water connection</b>	Metal hose with union nut G3/8", L = 1500 mm
<b>Water supply line</b>	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
<b>Water pressure</b>	80-800 kPa (0,8-8,0 bar)
<b>Flowrate</b>	>0.1l/sec
<b>Water temperature</b>	<25°C
<b>Water hardness</b>	4-8 °dH GH (German total hardness) / 7-14 °fH GH (French total hardness) / 70-140 ppm (mg/l)
<b>Chloride content</b>	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
<b>Acid content/pH value</b>	6.5-7.5 pH
<b>Chlorine content</b>	< 0.5 mg/l



## WATER DRAIN


<b>Drain hose</b>	Dia. = 16 mm, L = 2000 mm
-------------------	---------------------------

## ADD-ON UNITS


<b>COOLING UNIT</b>	<b>UT40 CM</b>
<b>Electrical connection</b>	220-240 V 1LNPE 50/60 Hz 0.72 A (10 A) 110-127 V 1LNPE 60 Hz (10 A)
<b>Dimensions</b>	525 mm / 740 mm / 686 mm (W / H / D)
<b>Weight (empty)</b>	approx. 38 kg
<b>Colors</b>	Door anthracite, body black



<b>COOLING UNIT</b>	<b>SU12 FM CM 20M</b>
<b>Electrical connection</b>	220-240 V 1LNPE 50/60 Hz 0.72 A (10 A) 110-127 V 1LNPE 60 Hz 1.5-1.7 A (10 A) 220 V 1LNPE 50 Hz 0.72 A (10 A) 100 V 1LNPE 50/60 Hz 1.7 A (10 A)
<b>Dimensions</b>	340 mm / 540 mm / 475 mm (W / H / D)
<b>Weight (empty)</b>	approx. 26 kg
<b>Colors</b>	Black, white or anthracite

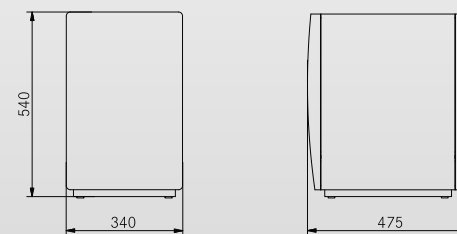


<b>FLAVOR STATION</b>	<b>FSU60 CM</b>
<b>Electrical connection</b>	100-240 VAC, 1L N PE, 50-60 Hz
<b>Dimensions</b>	264 mm / 415 mm / 350 mm (W / H / D)
<b>Weight (empty)</b>	approx. 13 kg
<b>Colors</b>	Black

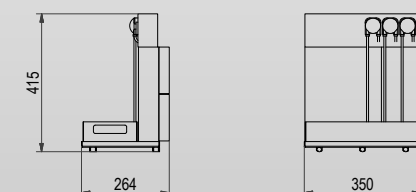


## ADD-ON UNITS


<b>FLAVOR STATION</b>	<b>FSU6</b>
<b>Electrical connection</b>	100-240 VAC, 1L N PE, 50-60 Hz
<b>Dimensions</b>	264 mm / 415 mm / 350 mm (W / H / D)
<b>Weight (empty)</b>	approx. 13 kg
<b>Colors</b>	Black

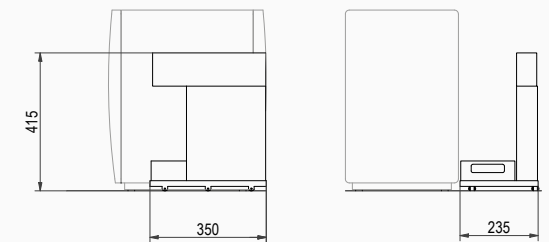


<b>FLAVOR STATION</b>	<b>FS6</b>
<b>Electrical connection</b>	220-240 VAC, 1L N PE, 50-60 Hz 110-127 VAC, 1L N PE, 50-60 Hz 100 VAC, 1L N PE, 50-60 Hz 220 VAC, 1L N PE, 50 Hz
<b>Dimensions</b>	200 mm / 540 mm / 453 mm (W / H / D)
<b>Weight (empty)</b>	approx. 22 kg
<b>Colors</b>	Black, white or anthracite

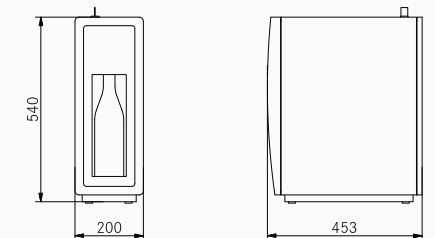

<b>CLEANMASTER BOX</b>	<b>CM Pump Module + Flavor Station</b>
<b>Electrical connection</b>	100-240 V, 1L N PE, 50-60 Hz
<b>Dimensions</b>	182-366mm / 193 mm / 395mm
<b>Weight (empty)</b>	approx. 2.5-4kg
<b>Colors</b>	Black

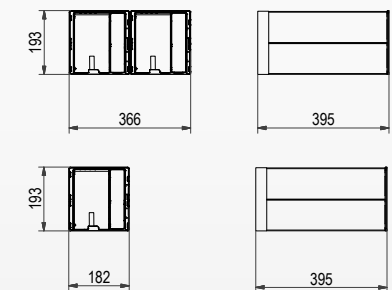

<b>ACCOUNTING SYSTEM</b>	<b>AC 200</b>
<b>Accounting systems</b>	Coin validator, Coin changer, Cashless system
<b>Electrical connection</b>	85-264 V 1LNPE 50/60 Hz (10 A)
<b>Dimensions</b>	200 mm / 630 mm / 453 mm (W / H / D)
<b>Weight (empty)</b>	approx. 18 kg
<b>Colors</b>	Black, white or anthracite

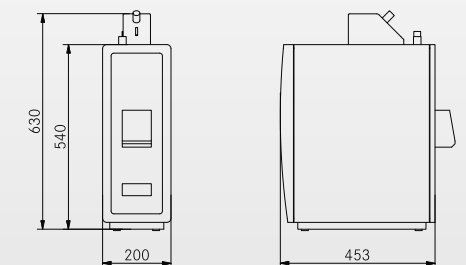

<b>ACCOUNTING SYSTEM</b>	<b>AC125CL</b>
<b>Electrical connection</b>	85-264V 1LNPE 50/60 Hz (10A)
<b>Dimensions</b>	125 mm / 150 mm / 310 mm (W / H / D)
<b>Weight (empty)</b>	approx. 2 kg
<b>Colors</b>	Black



<b>CUP WARMER</b>	<b>CW</b>
<b>Electrical connection</b>	220-240 VAC, 1L N PE, 110-130W, 50-60 Hz 110-127 VAC, 1L N PE, 80-130W, 50-60 Hz 100 VAC, 1L N PE, 80W, 50-60 Hz 220 VAC, 1L N PE, 110W, 50-60 Hz
<b>Dimensions</b>	270 mm / 540 mm / 454 mm (W / H / D)
<b>Weight (empty)</b>	approx. 20 kg
<b>Colors</b>	Black or anthracite

